



profondità scavi / depth of excavation 60 cm.

profondità scavi / depth of excavation 50 cm.

staffa antitrauma sfuso / bracket for loose safety matting

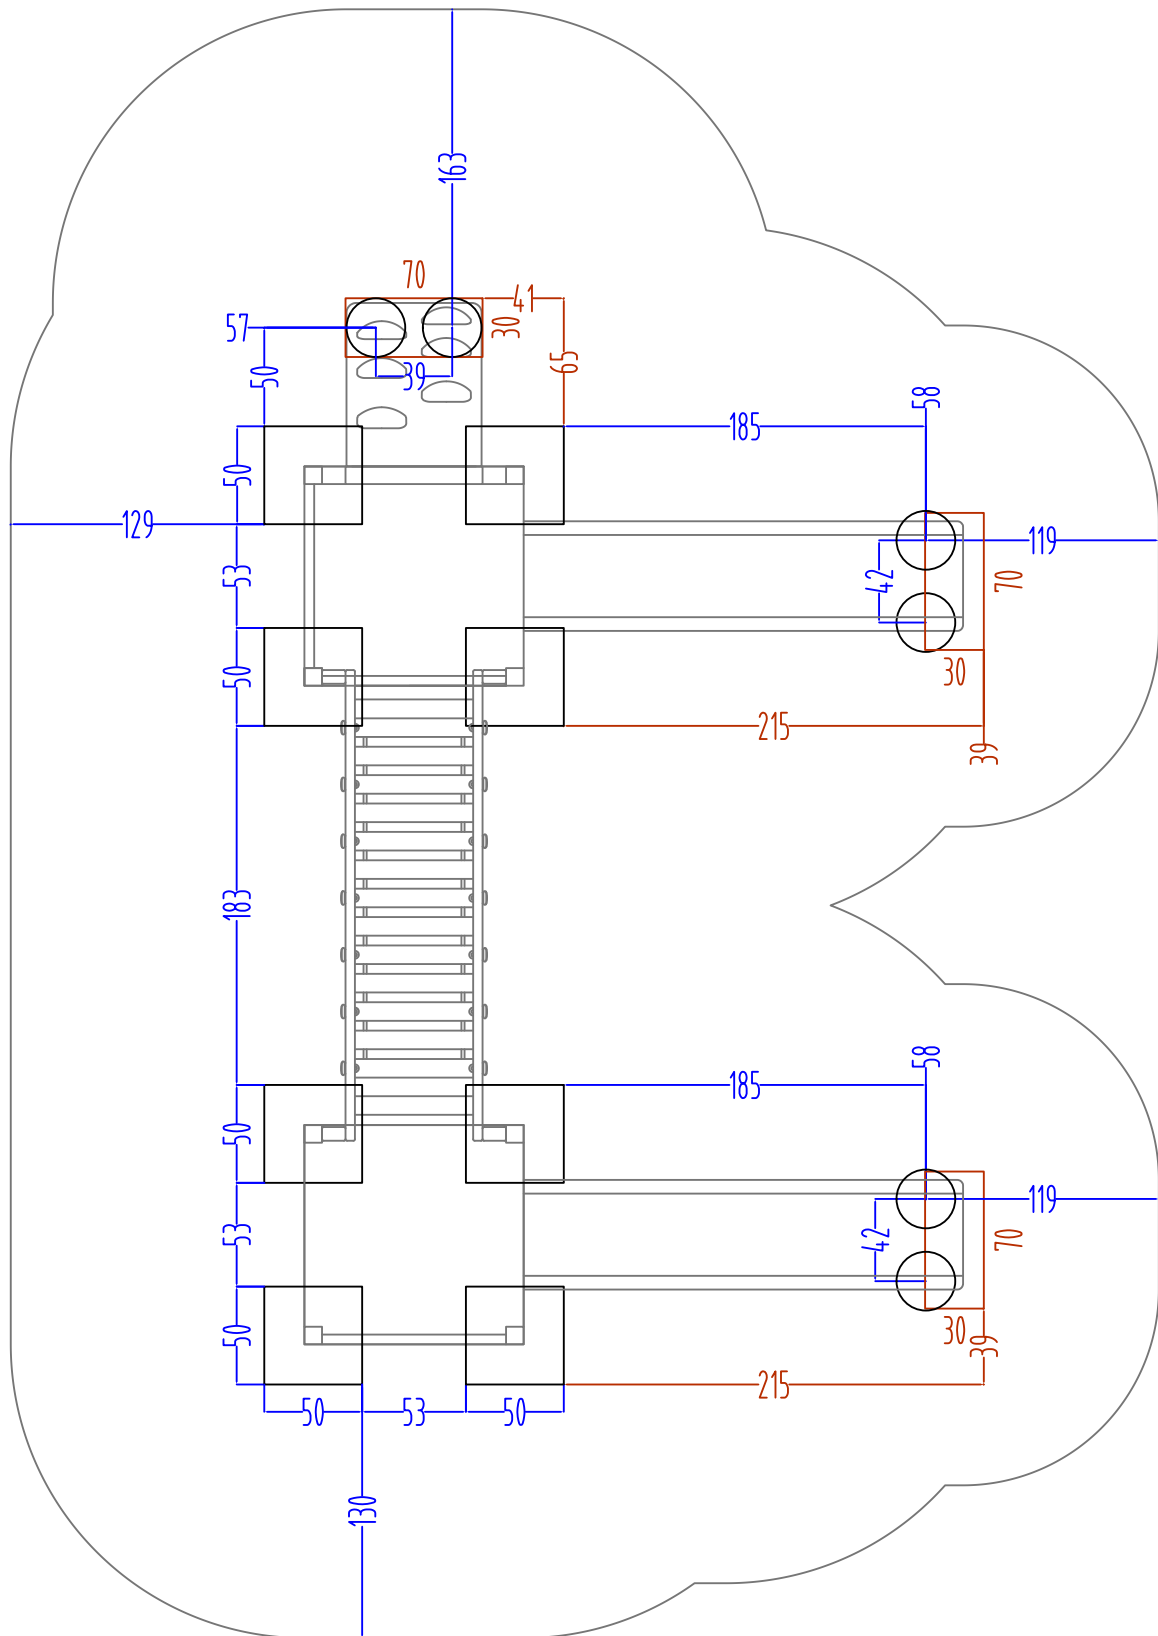

modifiche / amendments :				scala / scale : -		misure espresse in / dimensions are established in : CM.		HOLZHOFF 				
nr°	data/date	pos	descrizione/description	firma/sign	Inferenze generali applicate / general inferences : <ul style="list-style-type: none"><li>• sezione/diametro legname impregnato <math>\geq 0.5</math> (cm)</li><li>• lunghezza legname impregnato <math>\geq 1\%</math> (lungh. totale)</li><li>• lavorazioni legname impregnato <math>\geq 0.2</math> (cm)</li><li>• componenti in metallo 1 (mm)</li><li>• componenti in materiali plastici 1.5 (mm)</li></ul>		In colorazioni dei componenti raffigurati sono solo indicative e potranno variare a noi/ discretion. Il presente elaborato grafico è da ritenersi indicativo. La sua reale fattibilità deve essere preventivamente verificata in loco prima della conferma d'ordine. Nessuna responsabilità potrà essere attribuita alla scrivente. The colors that are visible in the rendering are just illustrative and can be modified. The graphic design as well is illustrative, and customers are compelled to verify the equipment's real feasibility before finalizing the order. We do not accept claims for similar themes.		denom. / name :	pianta scavi / excavation plant		
01									nr. dis. / draft nr. :	4041	codice / code :	xm200
02									luogo / place :	Mezzolombardo		
03									data / date :		29/01/18	
03									esecuzione/verifica/ approvazione : created/checked/approved by : 